
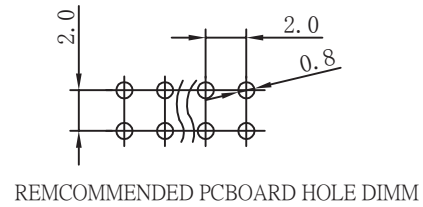


RoHS

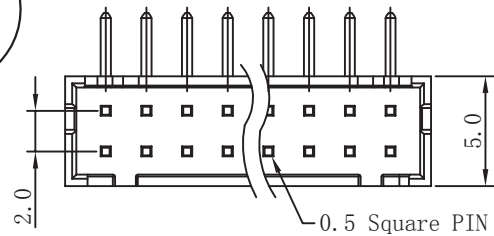

## SPECIFICATIONS

### Electrical

Current Rating: 2A AC, DC

Voltage Rating: 250V AC/ max.

Operating Temp.: -40 C ~ +85 C




Insulation Resistance: 1000M / min.

Contact Resistance: 20m / max.

### Material

Terminal Material: Brass/Tin-plated

Material: Nylon66, UL94V-0+GF

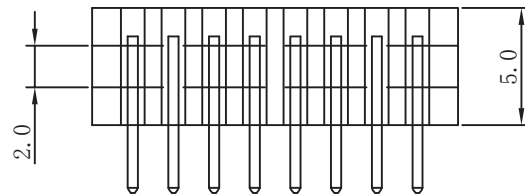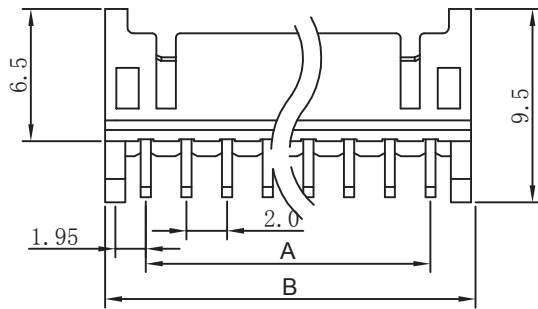

Poles	Dimensions(in)	
	A	B
4	2.0	6.0
6	4.0	8.0
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0
34	32.0	36.0
40	38.0	42.0